



345127

TANK MOUNTING KIT (CONSISTS OF 26 PIECES)

Front upper mounts consists of:


Pos	Qty	
4	1	5/16"x 2 3/4" bolt
12	1	5/16" lockwasher
8	2	5/16" x 1/16" flatwasher
15	1	5/16" hex nut

Front lower mount consists of:

Pos	Qty	
2	1	5/16" x 1" bolt
12	1	5/16" lockwasher
8	2	5/16" x 1/16" flatwasher
15	1	5/16" hex nut

Rear mounts (2) consists of:

Pos	Qty	
40	2	5/16" x 1 3/4" studs
15	2	5/16" hex nuts
13	2	5/16" internal lockwashers
4A	2	5/16" x 7/32" spacers
8	8	5/16" x 1/16" flatwashers

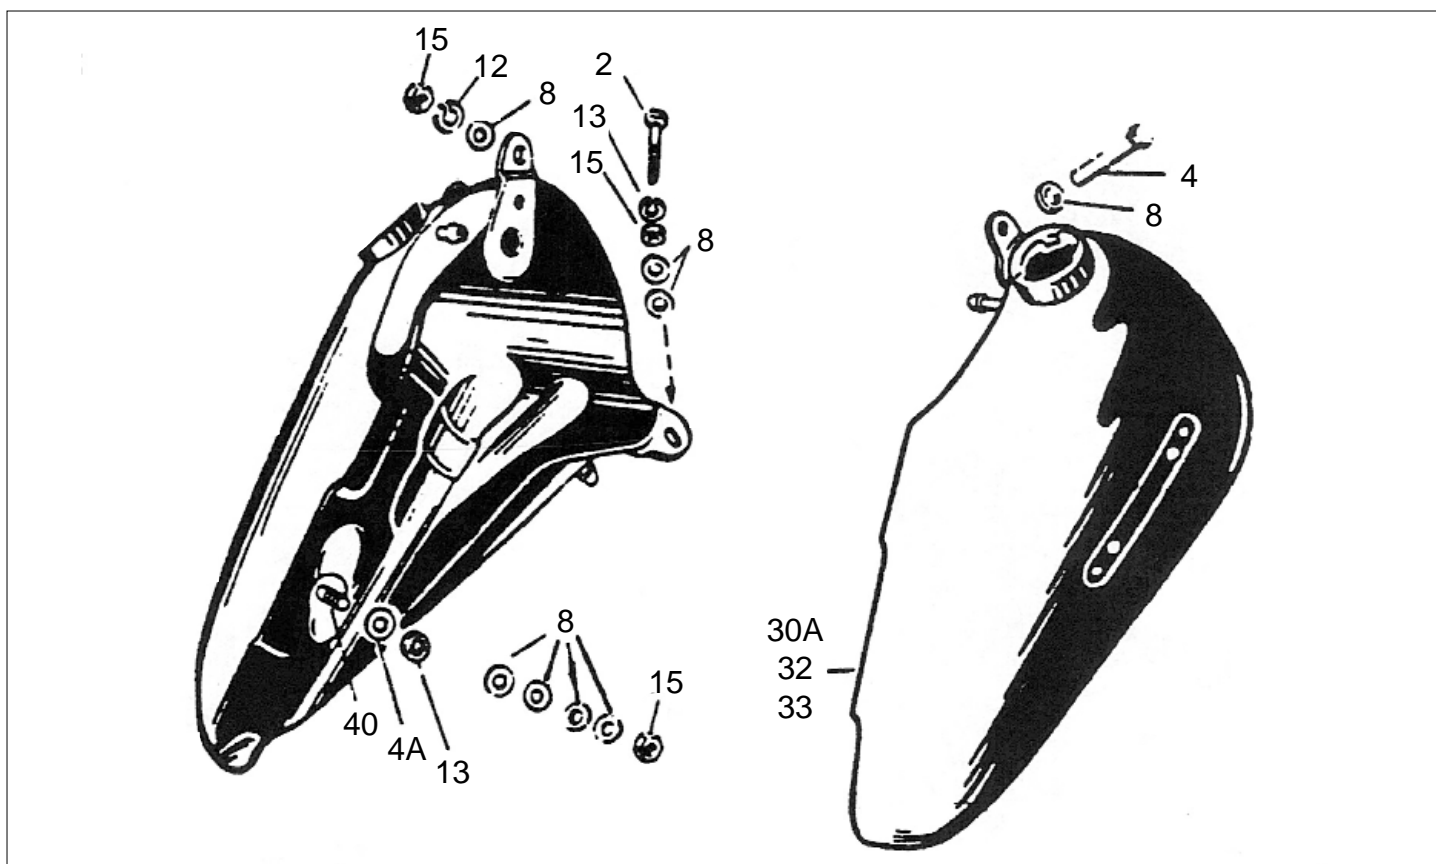

NOTE: Extra spacing flatwashers are provided to ensure that the tanks are properly adjusted so that they clear the rear cylinder rocker box cover. An easy method of determining this is, since it is difficult to see when the tanks are mounted, to use a sheet of paper (such as this instruction sheet as a thickness gauge). With the engine at operating temperature and the tank filled with fuel you should be able to easily slide the paper between the right tanks bottom and the rear cylinder rocker box. It is recommended, as in any gas tank installation, that the tanks be pressure tested before mounting, then sealed with tank prep and sealer (ZPN 232020) before painting to protect the final finish and prevent internal rusting.